

International Multidisciplinary
Research Journal

*Indian Streams
Research Journal*

Executive Editor
Ashok Yakkaldevi

Editor-in-Chief
H.N.Jagtap

Welcome to ISRJ

RNI MAHMUL/2011/38595

ISSN No.2230-7850

Indian Streams Research Journal is a multidisciplinary research journal, published monthly in English, Hindi & Marathi Language. All research papers submitted to the journal will be double - blind peer reviewed referred by members of the editorial board. Readers will include investigator in universities, research institutes government and industry with research interest in the general subjects.

International Advisory Board

Flávio de São Pedro Filho
Federal University of Rondonia, Brazil

Kamani Perera
Regional Center For Strategic Studies, Sri Lanka

Janaki Sinnasamy
Librarian, University of Malaya

Romona Mihaila
Spiru Haret University, Romania

Delia Serbescu
Spiru Haret University, Bucharest, Romania

Anurag Misra
DBS College, Kanpur

Titus PopPhD, Partium Christian
University, Oradea, Romania

Mohammad Hailat
Dept. of Mathematical Sciences,
University of South Carolina Aiken

Abdullah Sabbagh
Engineering Studies, Sydney

Ecaterina Patrascu
Spiru Haret University, Bucharest

Loredana Bosca
Spiru Haret University, Romania

Fabricio Moraes de Almeida
Federal University of Rondonia, Brazil

George - Calin SERITAN
Faculty of Philosophy and Socio-Political
Sciences Al. I. Cuza University, Iasi

Hasan Baktir
English Language and Literature
Department, Kayseri

Ghayoor Abbas Chotana
Dept of Chemistry, Lahore University of
Management Sciences[PK]

Anna Maria Constantinovici
AL. I. Cuza University, Romania

Ilie Pinteau,
Spiru Haret University, Romania

Xiaohua Yang
PhD, USA

.....More

Editorial Board

Pratap Vyamktrao Naikwade
ASP College Devrukh, Ratnagiri, MS India Ex - VC. Solapur University, Solapur

R. R. Patil
Head Geology Department Solapur
University, Solapur

Rama Bhosale
Prin. and Jt. Director Higher Education,
Panvel

Salve R. N.
Department of Sociology, Shivaji
University, Kolhapur

Govind P. Shinde
Bharati Vidyapeeth School of Distance
Education Center, Navi Mumbai

Chakane Sanjay Dnyaneshwar
Arts, Science & Commerce College,
Indapur, Pune

Awadhesh Kumar Shirottriya
Secretary, Play India Play, Meerut (U.P.)

Iresh Swami
Ex - VC. Solapur University, Solapur

N.S. Dhaygude
Ex. Prin. Dayanand College, Solapur

Narendra Kadu
Jt. Director Higher Education, Pune

K. M. Bhandarkar
Praful Patel College of Education, Gondia

Sonal Singh
Vikram University, Ujjain

G. P. Patankar
S. D. M. Degree College, Honavar, Karnataka

Maj. S. Bakhtiar Choudhary
Director, Hyderabad AP India.

S. Parvathi Devi
Ph.D.-University of Allahabad

Sonal Singh,
Vikram University, Ujjain

Rajendra Shendge
Director, B.C.U.D. Solapur University,
Solapur

R. R. Yaliker
Director Management Institute, Solapur

Umesh Rajderkar
Head Humanities & Social Science
YCMOU, Nashik

S. R. Pandya
Head Education Dept. Mumbai University,
Mumbai

Alka Darshan Shrivastava
Shaskiya Snatkottar Mahavidyalaya, Dhar

Rahul Shriram Sudke
Devi Ahilya Vishwavidyalaya, Indore

S. KANNAN
Annamalai University, TN

Satish Kumar Kalhotra
Maulana Azad National Urdu University

TEMPERATURE DEPENDENT DIELECTRIC RELAXATION STUDY OF ETHANOL-N N DIMETHYL FORMAMIDE BINARY MIXTURE AT GIGA HERTZ FREQUENCY RANGE.



Patil H. T.¹ and Shivalkar K.N.²

Department of Physics, Mahatma Gandhi Mahavidyalaya, Ahmedpur, India.



ABSTRACT

Dielectric Behavior of N,N-Dimethyl Acetamide [$\text{CH}_3\text{CON}(\text{CH}_3)_2$] – Ethanol [$\text{C}_2\text{H}_5\text{OH}$] binary mixture at different temperatures 15, 25, 35 and 45°C have been determined over frequency range of 10 MHz to 20 GHz. Using the Time Domain Reflectometry Technique in reflection mode for 11 different concentrations of given binary system has been used to measure reflection coefficient. Further Fourier transform and least square fit method have been used to obtain dielectric parameters such as dielectric constant (ϵ') and relaxation time (τ). The dielectric constant decreased with an increase in temperature where as it increased with increase in

concentration. Relaxation time decreased with an increase in temperature and concentration. By using dielectric parameters excess permittivity (ϵ^E), excess inverse relaxation time ($1/\tau^E$) and Kirkwood factor (g) and (g^{eff}) has been worked out.

KEYWORDS : Time domain reflectometry, Dielectric parameters, Excess parameters, Kirkwood correlation factor.

INTRODUCTION

Dielectric relaxation studies on binary mixtures are important for understanding the hydrogen bonding and inter molecular interaction in the mixture. A dielectric study yields the Kirkwood correlation factor, which is strongly correlated with the solute solvent interaction these parameters give systematic change in structure of solute and solvent at different temperature for different concentrations.

Dielectric parameters for Ethanol-tetrahydrofuron, ethanol-dimethyl formamide, ethanol-dimethylsulfoxide, ethanol-2ethoxy ethanol, ethanol-aniline, ethanol-nitrobenzene, ethanol-nitro toluene, were repeated by our earlier group (choudhari et al 1999, 2001, Khirade et al 1999a, 1999b, patil et al 1999).

All the above systems showed systematic change in the dielectric parameters with Concentration and temperature

The aim of present work is to report a dielectric study on ethanol - N, N Dimethyl Acetamide

mixtures conducted using Time Domain Reflectometry [TDR] at the frequency range 10MHz to 20GHz. The dielectric parameters viz. the static dielectric constant ϵ_0 , relaxation time τ was determined. The Kirkwood correlation factor, excess dielectric parameters obtained for 15°C, 25°C, 35°C & 45°C in order to obtain structural information about the binary mixtures.

2. EXPERIMENTAL SETUP:

Ethanol [AR grade], N,N-Dimethyl acetamide [AR grade sd. Fine chem. Limited Mumbai] was used without further purification.

The solutions were prepared by mixing Dimethyl Acetamide and ethanol with different concentrations at room temperature assuming ideal mixing behavior.

Composition in step of 10% by volume with in a 0.02% error limit.

The complex permittivity spectra were studied using TDR (Cole et al 1989).

A 200mv pulse from a tunnel diode pulse generator block with a rise time of 25ps to 45ps and repetitive frequency of 1 kHz was transmitted along a 3.5mm transmission line with characteristic impedance of 50ohms. The sample cell was placed at the end of the transmission line, after the sample head.

The length of transmission line which connects pulse generator and Sampling head was about twice of the transmission line which connects sampling head and cell so that the incident pulse was well separated from the reflected pulse. The required cell was designed in such a way that its impedance matched with the transmission line.

A Tektronics 7854 sampling oscilloscope was used to sample the reflected pulse. The time window used for the experiment was kept at 500ps/division or 5ns. The reflected pulse was digitized with 1024 points in the selected time window. The oscilloscope transfer to computer by using 1.44MB floppy.

First, the reflected pulse $R_1(t)$ & $R_x(t)$ without and with a sample in the cell respectively, were recorded. Time referencing was done by matching small reflection due to a particular discontinuity at the beginning of the cell in $R_1(t)$ & $R_x(t)$. Subtraction and addition of these pulses were done in the memory of the oscilloscope after proper time shifting. The subtracted pulse and added pulse were transferred to the computer for further analysis.

The temperature controller system with a water bath and a thermostat was used to maintain the constant temperature with an accuracy limit of + or - 1°C. The sample was surrounded by an insulating container, through which water obtained at a constant temperature using temperature controller system was circulated. The temperature at the cell was checked using an electronic thermometer.

3. DATA ANALYSIS:

The time dependent data were processed to obtain complex reflection coefficient spectra $\rho^*(\omega)$ over the frequency range from 10MHz to 20GHz using Fourier transformation [Shannon 1949, Samulon 1951]

$$\rho^*(\omega) = (c/j\omega d) [p(\omega)/q(\omega)] \quad \dots(1)$$

Where ω is the angular frequency, $p(\omega)$ and $q(\omega)$ are the Fourier transform of $R_1(t)-R_x(t)$ and $R_1(t)+R_x(t)$, respectively, c is the velocity of light, d is the effective pin length and $j = -1^{1/2}$.

The complex permittivity spectra $\epsilon^*(\omega)$ were obtained from reflection coefficient spectra $\rho^*(\omega)$ by applying bilinear calibration method (Cole et al 1989). In the calibration process, pure liquids were

used as a calibrating liquids

The experimental values of $\epsilon^*(\omega)$ were fitted with the Debye equation (Haverliakand Nigami 1966, Cole and Cole 1941, Davidson and Cole 1950)

$$\epsilon^*(\omega) = \epsilon_{\infty} + \frac{\epsilon_0 - \epsilon_{\infty}}{1 + (j\omega\tau)^2} \quad \dots(2)$$

Where ϵ_0 , ϵ_{∞} and τ are fitting parameters in equation (2), ϵ_0 is the static dielectric constant, ϵ_{∞} is the high frequency dielectric constant and τ is the relaxation time. A non linear least square fit method (Bevington 1969) was used to determine the values of the dielectric parameters.

ie $\epsilon^*(\omega)$ were obtained from reflection spectra $\epsilon^*(\omega)$. The examples of $\epsilon'(\omega)$ and $\epsilon''(\omega)$ spectra are shown in fig 1(a) & 1(b) respectively.

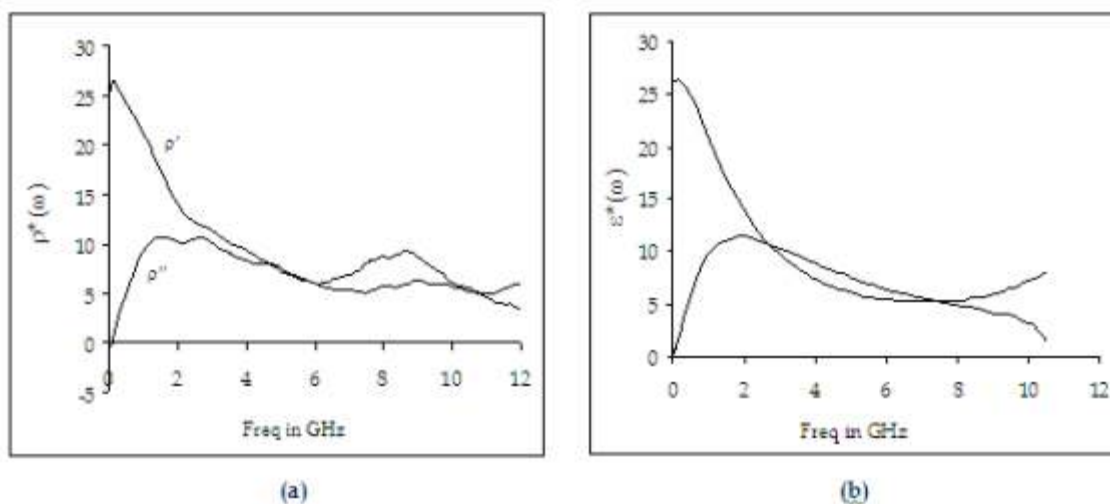


Fig. 1 Spectra for the mixture of 20 % DMA + 80 % Ethanol at 25°C

4. RESULTS AND DISCUSSION:

The density ρ , ϵ_0 and τ values for the pure liquids used are given in table 1, along with the values taken from the literature. The static dielectric constant (ϵ_0) and relaxation time (τ) obtained by fitting experimental data to the Debye equation are listed in the table 2.

Table1. Comparison of data for the liquids with values from the literature at 25°C

Liquids	ϵ_0		τ		$\rho/\text{g cm}^{-3}$
	This work	literature	this work	literature	literature
A - Ethanol	24.56	24.7	133.33	146.9	0.7850
B - NN Dimethyl Acetamide	38.77	39.67	21.95	18.22	0.9367

Table 2. Dielectric parameters for the Dimethyl Acetamide – Ethanol system

Vol% of DMA	15 ⁰ c		25 ⁰ c	
	ϵ	τ	ϵ	τ
00	24.85(2)	148.57(44)	24.56(0)	133.33(11)
10	24.84(1)	108.47(16)	24.51(1)	104.63(12)
20	27.29(1)	97.5(12)	26.12(1)	83.10(10)
30	27.34(1)	70.55(9)	26.74(1)	68.96(11)
40	30.50(1)	60.81(7)	29.46(1)	55.27(06)
50	31.20(1)	50.72(6)	30.25(1)	48.21(06)
60	32.52(1)	45.28(6)	31.61(1)	40.11(05)
70	34.98(1)	40.34(5)	33.42(1)	36.10(05)
80	38.07(3)	34.87(9)	34.76(1)	30.64(05)
90	38.79(2)	28.83(7)	36.87(1)	26.75(05)
100	39.99(1)	23.46(5)	38.77(2)	21.95(06)

Vol% of DMA	35 ⁰ c		45 ⁰ c	
	ϵ	τ	ϵ	τ
00	23.59(0)	124.26(9)	23.23(0)	113.27(9)
10	24.21(1)	97.04(10)	24.12(0)	78.50(7)
20	25.41(1)	75.81(9)	24.68(1)	70.65(8)
30	26.41(1)	62.08(8)	26.00(1)	55.92(6)
40	28.11(1)	53.85(7)	26.91(1)	49.11(7)
50	29.48(1)	45.82(6)	28.60(1)	44.04(5)
60	30.51(1)	39.23(6)	30.18(1)	33.96(4)
70	32.62(1)	33.14(5)	31.69(1)	30.29(3)
80	33.86(1)	29.12(5)	33.75(1)	26.56(3)
90	36.25(2)	24.06(6)	35.77(2)	23.06(4)
100	38.22(2)	20.43(6)	38.12(3)	19.95(8)

Numbers in bracket indicate uncertainty, 24.51(1) means 24.51 ± 0.01

The excess parameters (hosamani et al 1995) related ϵ^E and τ^E

ie. Excess permittivity and excess relaxation time provide information about formation of

Multimers or monomers in the mixture.

The excess permittivity is defined as

$$\epsilon^E = (\epsilon_0 - \epsilon_\infty)_m - [(\epsilon_0 - \epsilon_\infty)_A X_A + (\epsilon_0 - \epsilon_\infty)_B X_B] \quad \dots 3$$

Where X is the mole fraction and suffix m, A & B represent the mixture, solvent and solute, respectively.

1) $\epsilon^E = 0$ indicates the solute and solvent do not interact at all

2) $\epsilon^E < 0$ indicates the solute and solvent interact in such a way that the total effective dipoles are reduced. The solute and solvent may be form multimers leading to the less effective dipoles

3) $\epsilon^E > 0$ indicates the solute and solvent interact in such a way that the total effective dipole moment increases. There is a formation of monomers and dimmers.

Similarly the excess inverse relaxation time is defined as

$$(1/\tau)^E = (1/\tau)_{\text{m}} - [(1/\tau)_A X_A + (1/\tau)_B X_B] \quad \dots 4$$


Where $(1/\tau)^E$ is the excess inverse relaxation time, which represent the average broadening of dielectric spectra. The inverse relaxation time analogy is taken from spectral line broadening (which is the inverse of relaxation time) from resonant spectroscopy (Mehrotra and Boggs, 1977)

The information regarding the dynamics of solute solvent interaction gives from this excess property is as follows

- 1) $(1/\tau)^E = 0$ there is no change in the dynamics of solute solvent interaction
- 2) $(1/\tau)^E < 0$ the solute solvent interaction produces a field such that the effective dipoles rotate slower.
- 3) $(1/\tau)^E > 0$ the solute solvent interaction produces a field such that the effective dipoles rotate faster. i.e. the field facilitates rotation of dipoles.

The variation of $[\epsilon^E$ and $(1/\tau)^E$] excess parameters with mole fraction of DMA at 15, 25, 35 and 45°C is shown in following fig.

Fig 2.....

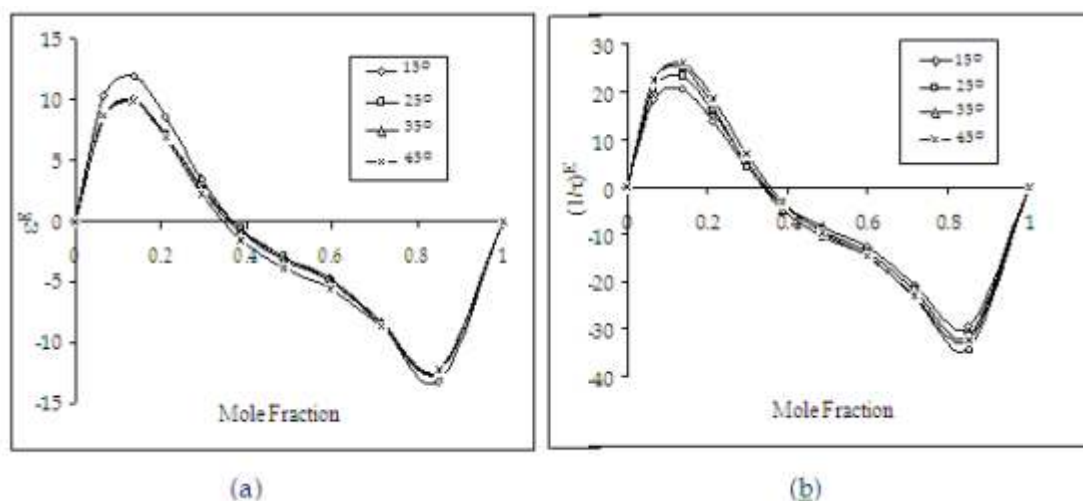

In the present work (ϵ^E) is positive in the solvent rich region. This indicates the formation of monomeric structure, which increases the total number of dipoles. Whereas in the solute rich region, ϵ^E is negative, indicating formation of dimeric structures, which leads to a decrease of the total number of dipoles in the system

The excess relaxation time of these systems is positive in the solvent rich region. This indicates fast rotation of dipole. This may be due to the formation of monomeric structures in this region. In the DMA rich region these values are negative. This indicates the formation of structure probably dimeric, which rotate slowly.

The experimental values of both excess parameters were fitted to the Redlich-Kister equation

$$Y^E = (X_A - X_B) \sum B_K (X_A - X_B)^K \quad \dots 5$$

Where Y is either ϵ^E or $(1/\tau)^E$. By using the B_K values Y^E values were calculated & used as to draw curves shown in fig 2a and 2b.

The structural information about the liquids by dielectric relaxation parameters can be obtained by Kirkwood correlation parameter (H Frohlich 1949). The Kirkwood correlation factor g is

also a parameter for getting information regarding the orientation of electric dipoles in polar liquids may be obtained by the expression

$$(4\pi N \mu^2 \rho / 9KT M) g = (\epsilon_0 - \epsilon_\infty) (2\epsilon_0 + \epsilon_\infty) / \epsilon_0 (\epsilon_\infty + 2)^2 \quad \dots 6$$

Where μ is the dipole moment is in gas phase, ρ is the density at temperature T, M is the molecular weight, K is the Boltzman constant & N is the Avogadro's number.

The modified form of this equation [ac kumbarkhane 1993, S.M. Puranic1994] has been used to study the orientation of electric dipole in binary mixtures of the two polar liquids say A&B, the above equation is modified assuming that for the mixture g^{eff} has become effective correlation factor in the mixture.

The Kirkwood equation for the mixture can be expressed as

$$(4\pi N / 9KT) [(\mu^2 A \rho_A \Phi_A / M_A) (\mu^2 B \rho_B \Phi_B / M_B)] g^{\text{eff}} = (\epsilon_{0m} - \epsilon_{\infty m}) (\epsilon_{0m} + \epsilon_{\infty m}) / \epsilon_{0m} (\epsilon_{\infty m} + 2)^2 \quad \dots 7$$

Where g^{eff} is the effective Kirkwood correlation factor for a binary mixture with A & B as weight fraction of liquids A & B respectively. The calculated values of g^{eff} are tabulated in following table

Table 3

Vol.% of Ethanol	15 ^o c	25 ^o c	35 ^o c	45 ^o c
100	0.5794	0.5848	0.5786	0.5875
90	0.5715	0.5829	0.5944	0.6113
80	0.6316	0.6235	0.6258	0.6260
70	0.6322	0.6387	0.6514	0.6614
60	0.7095	0.7076	0.6957	0.6855
50	0.7260	0.7270	0.7311	0.7308
40	0.7577	0.7609	0.7574	0.7730
30	0.8174	0.8061	0.8121	0.8132
20	0.8924	0.8993	0.8438	0.8682
10	0.9090	0.8919	0.9056	0.9220
00	0.9374	0.9391	0.9562	0.9845

The g^{eff} values decrease with increase in percentage of ETH in DMA. These values are approximately close to unity for pure DMA and in DMA rich region it indicates no correlation, but deviation from unity in the ETH rich region is more, which indicates the antiparallel alignment of dipoles and suggest the monomeric type structure, this reveals the inter molecular attraction.

i.e. in this system alignment of dipoles changes from anti parallel to parallel arraignment with increasing concentration of DMA.

5. CONCLUSION:

The binary mixture of Ethanol and Dimethyl Acetamide has been studied at various temperature and concentrations using time domain reflectometry. The static permitivity and relaxation time have been obtained with various concentrations at different temperature for the mixture. The parameters

such as Kirkwood correlation factor, excess permittivity and excess inverse relaxation time give information about interaction of molecules in the system and systematic change of structure on addition of Dimethyl acetamide in ethanol.

6. REFERENCES:

- 1) Ajay chaudhari, N.M. More, and S.C Mehrotra, Bull Korean chem. Soc. 2001; vol.22, No 4, 357-361
- 2) Ajay chaudhari, Anita Das, Gargipati Raju, Harish chaudhari, prakash khirade, Navinkumar Naraian and Suresh mehrotra, Proc. Nati. Sci. coun. Roc (A) vol 25, No.4, 2001 PP.205-210.
- 3) Ajay chaudhari, G.S. Raju, Anita Das, Harish chaudhari, N.K.Naraian and Suresh mehrotra, Ind.J.of pure and applied physics vol.39, march 2001; pp 180-183.
- 4) P.W. Khirade, Aajay Chaudhari, J.B Shinde, S.N. Helambe and S.C. Mehrotra. J.chem.Eng. Data 1999, 44, 879-881.
- 5) V.P Pawar and S.C Mehrotra. Bulletin of pure and appl. Sci. Vol.20D(No.1)2001; p. 9-16
- 6) Aajay Chaudhari, M.K.Lande, B.R.Arbad, D.V.Jahagirdar and S.C.Mehrotra. J. Mole. Liquids 100/3.(2002) 207-215.
- 7) Cole R H, J G Berbarian, S Mahimo, G Chryssikos, A. Burns. And E.Tombouri. J. Appl.phy; 66, (1989) 793-802.
- 8) Shanon CE Proc. IRE(1949) 37,10
- 9) Shamulan H A. IRE (1951), 39, 175-183.
- 10) Haverliak and Nigami. J. polym. sci. (1966), polym. Symp; 6, 99-117.
- 11) Cole K S and R H Cole J. Chem. Phy. (1941), 9, 341-345.
- 12) Davidson D W and R H Cole. J.Chem. Phy. (1950), 18, 1417
- 13) Bevington P R (1969) McGraw- Hill, New York, NY; USA
- 14) Hosamani M T, R H Fattepur, D K Deshpande, and S C Mehrotra (1995) J. Chem.soc. Faraday Trans; 91(4), 623-626.
- 15) Mehrotra S C and J E Boggs J. Chem.Phys. (1977); 66, 5306.
- 16) Frolhich H. Oxford university press London, 1949, U.K.
- 17) Kumbarkhane A.C, S M Puranic and S C Mehrotra J. Mol.Lqi, (1992); 51, 261.
- 18) Kumbarkhane A.C, S M Puranic and S C Mehrotra J. sol.Chem. (1993), 22, 219-229.

Publish Research Article International Level Multidisciplinary Research Journal For All Subjects

Dear Sir/Mam,

We invite unpublished Research Paper, Summary of Research Project, Theses, Books and Book Review for publication, you will be pleased to know that our journals are

Associated and Indexed, India

- ★ International Scientific Journal Consortium
- ★ OPEN J-GATE

Associated and Indexed, USA

- Google Scholar
- EBSCO
- DOAJ
- Index Copernicus
- Publication Index
- Academic Journal Database
- Contemporary Research Index
- Academic Paper Database
- Digital Journals Database
- Current Index to Scholarly Journals
- Elite Scientific Journal Archive
- Directory Of Academic Resources
- Scholar Journal Index
- Recent Science Index
- Scientific Resources Database
- Directory Of Research Journal Indexing

Indian Streams Research Journal
258/34 Raviwar Peth Solapur-413005, Maharashtra
Contact-9595359435
E-Mail-ayisrj@yahoo.in/ayisrj2011@gmail.com
Website : www.isrj.org